



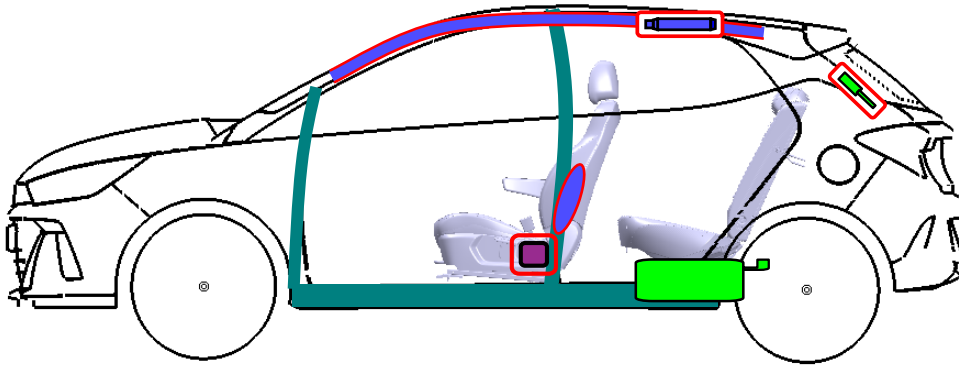

Hyundai HB20
Hatchback, 5 doors
From JUN 2022

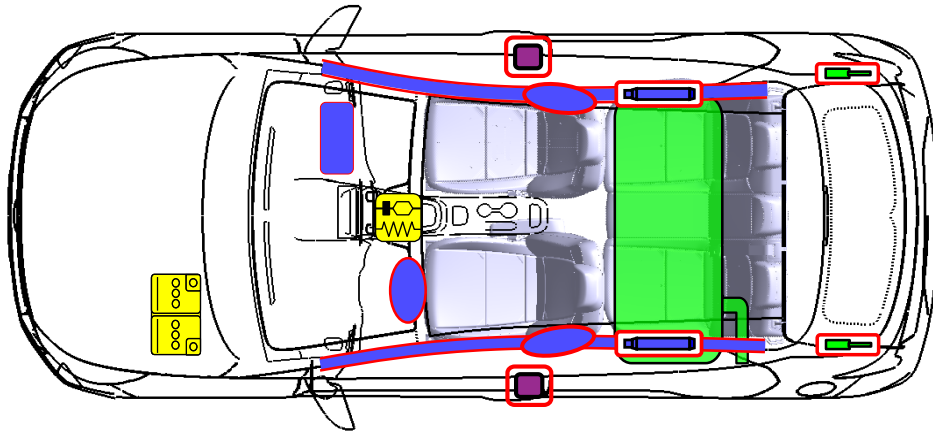


Reserved for holes (paper version)

	Airbag		Stored gas inflator		Seat belt pretensioner		SRS control unit		Pedestrian protection active system
	Automatic rollover protection system		Gas strut/Preloaded spring		High strength zone		Zone requiring special attention		
	Battery low voltage		Ultra capacitor, low voltage		Fuel tank		Gas tank		Safety valve
	High voltage battery pack		High voltage power cable/component		High voltage disconnect		Fuse box disabling high voltage system		Ultra capacitor, high voltage


	ID No.	Version No.	Version date	Page
	9BH-CN5-RS-I-1-202304	1.0	Jul, 2023	1 of 4

1. Identification / recognition

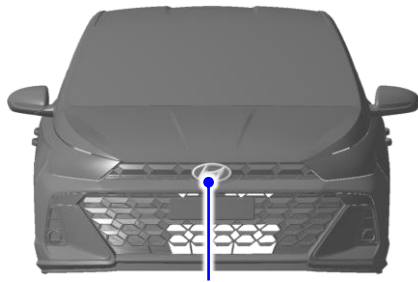

Brand Emblem

Car model name
HB20

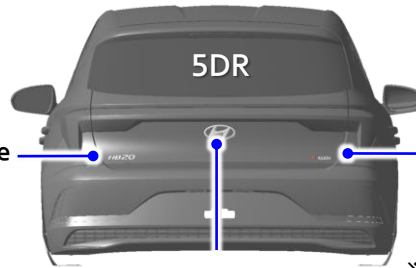


Brand Emblem


Engine Type
TGDI

※ Only TGDI
(MPI : No Characters)

2. Immobilisation / stabilisation / lifting

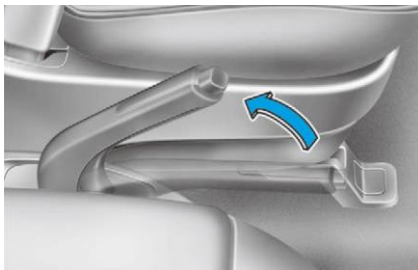


Pull up the parking brake as far as possible

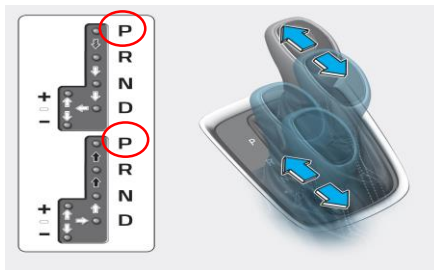

If automatic transmission: move shift lever to parking position (P)

▣ Lifting points under the vehicle : ▲

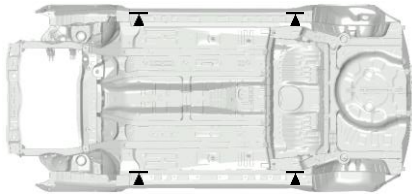


3. Disable direct hazards / safety regulations

▣ Access to the battery  




1. Pull the release lever to unlatch the hood. The hood should pop open slightly.



2. Go to the front of the vehicle, raise the hood slightly, push the secondary latch up (1) inside of the hood center and lift the hood (2).



3. Hold the hood open with the support rod (3).



4. 12V battery in the engine compartment

▣ Disabling procedure  

① Turn the ignition switch off

② Disconnect the negative(-) terminal

③ Disconnect the positive(+) terminal

	ID No.	Version No.	Version date	Page
	9BH-CN5-RS-I-1-202304	1.0	Jul. 2023	2 of 4

4. Access to the occupants

▣ Glass


- ① : Laminated / ② : Tempered
- ③ : Tempered / ④ : Tempered



▣ Vehicle body

High Strength zone

Tensile Strength
600MPa↑

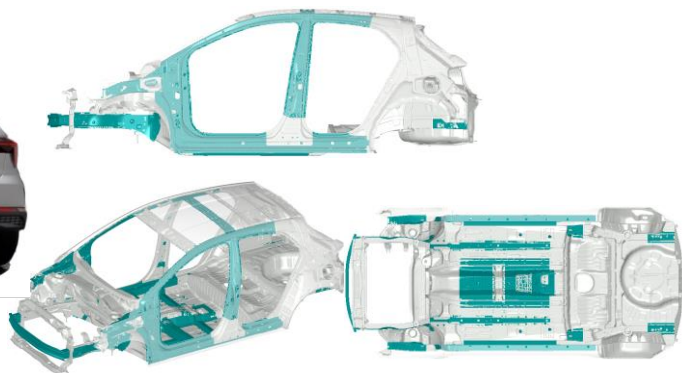

5. Stored energy / liquids / gases / solids

▣ Fuel Tank



Gasoline tank : 50L



▣ Battery




12 V




8. Towing / transportation / storage

▣ OK

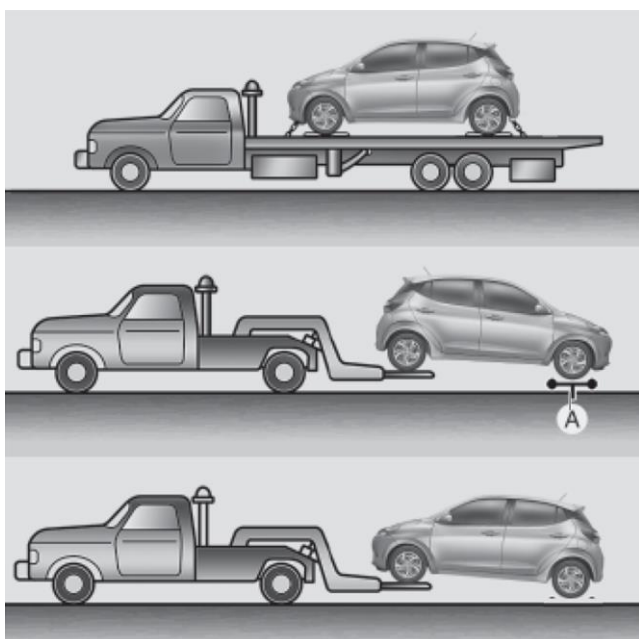





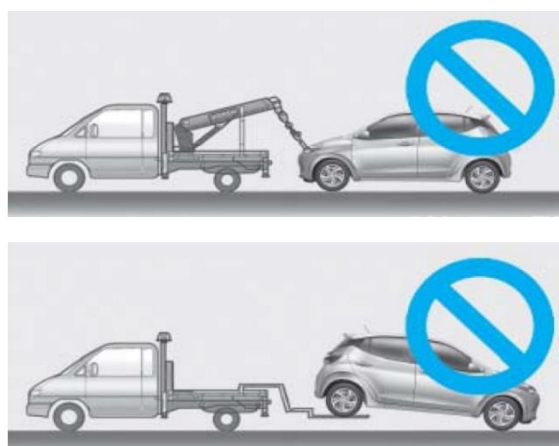




[A] : Dolly

▣ NOT OK



	ID No.	Version No.	Version date	Page
	9BH-CN5-RS-I-1-202304	1.0	Jul, 2023	3 of 4

10. Explanation of pictogram used

	Gasoline vehicle		Fuel tank content gasoline/ethanol
	Environmental hazard		Risk of damaging human health
	Risk of corrosive material / substances		Risk of flammability
	Lifting points		Bonnet
			Battery low-voltage